

4

HITRONIC® Optical transmission systems

HITRONIC® fiber optic cables make transmitting large data volumes easy: fault free, bug proof and at almost light speed. Even electromagnetic radiation doesn't interfere with transmission. The HITRONIC® range includes the ideal solution for indoor or outdoor use, for demanding conditions, and even for use in power chains.

Application range

- Telecommunications and network technology
- Industrial cabling and automation level
- Industrial machinery and plant engineering
- Data transmission under harsh conditions (mining and tunnel construction, oil and gas platforms, wind power plants)

POF: polymer optical fiber

- 267 HITRONIC® POF SIMPLEX PE**
Simplex buffered polymer optical fiber cable
- 268 HITRONIC® POF SIMPLEX PE-PUR**
Simplex buffered polymer optical fiber cable with strain relief & PUR outer jacket
- 269 HITRONIC® POF DUPLEX PE**
Duplex buffered polymer optical fiber cable
- 270 HITRONIC® POF DUPLEX PE-PUR/HEAVY PE-PUR**
Duplex buffered polymer optical fiber cable with strain relief & PUR outer jacket

PCF: plastic-clad fiber

- 271 HITRONIC® PCF DUPLEX**
Duplex buffered plastic-clad fiber cable for stationary applications
- 272 HITRONIC® PCF DUPLEX FD**
Duplex buffered plastic-clad fiber cable for continuous flex applications

GOF: glass optical fiber

- 273 HITRONIC® HQN**
Single-mode & multi-mode glass optical fiber cable for outdoor applications
- 274 HITRONIC® HUN**
Single-mode & multi-mode glass optical fiber cable for indoor & outdoor applications
- 275 HITRONIC® HDM**
Multi-mode glass optical fiber cable for frequent reeling and unreeling
- 276 HITRONIC® TORSION**
Single-mode & multi-mode glass optical fiber cable for torsion applications
- 277 HITRONIC® FIRE**
Single-mode & multi-mode glass optical fiber cable with fire-resistant design

HITRONIC® POF SIMPLEX PE

Simplex buffered polymer optical fiber cable



HITRONIC® POF SIMPLEX PE is a simplex buffered fiber optic cable for transmission lengths up to 230 ft (70 m). The flexible and lightweight design allows easy handling. The cable is suitable for direct connector assembly.

Construction

Core: polymethyl methacrylate (PMMA)

Cladding: fluoropolymers

Buffer tube: halogen-free polyethylene; black

Recommended applications

Stationary indoor applications in control cabinets, cable ducts, or pipes with low mechanical stress

Application advantage

- Transmission lengths up to 230 ft (70 m)
- Suitable for direct connector assembly
- Easy to handle
- No crosstalk
- Protected against EMI

Approvals



Cable attributes		page 648	
OIL	OR-00	FLAME	FR-00
MOTION	FL-01	MECH.	MP-01

Technical data

Minimum bend radius:	10 x cable diameter	Permissible tensile force:	
		- stationary installation:	5 N
		- short-term:	15 N
Temperature range:		Cable designation:	J-V2Y 1P 980/1000
- operating temperature:	-55°C to +85°C		
- installation temperature:	-10°C to +50°C		

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight lbs/mft
			in	mm	
28000001	980/1000 POF	1	0.087	2.2	3

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® POF SIMPLEX PE-PUR

Simplex buffered polymer optical fiber cable with strain relief & PUR outer jacket

LAPP KABEL STUTTGART HITRONIC® POF SIMPLEX PE-PUR



HITRONIC® POF SIMPLEX PE-PUR is a simplex buffered fiber optic cable. The cable design includes aramid yarns for strain relief and a rugged PUR outer jacket, which makes the cable highly resistant to oil and abrasion.

Construction

- Core: polymethyl methacrylate (PMMA)
- Cladding: fluoropolymers
- Buffer tube: polyethylene; black
- Outer jacket: halogen-free polyurethane; orange
- Strain relief: aramid yarns

Recommended applications

Indoor optical signal transmission in industrial applications with high mechanical stress

Application advantage

- Transmission lengths up to 230 ft (70 m)
- Suitable for direct connector assembly
- Resistant to abrasion, oil, microbes, and hydrolysis
- Flame-retardant & halogen-free jacket

Approvals



Cable attributes		page 648	
OIL	OR-04	FLAME	FR-01
MOTION	FL-01	MECH.	MP-05

Technical data

<p> Minimum bend radius:</p> <ul style="list-style-type: none"> - for stationary use: 10 x cable diameter - short-term: 6 x cable diameter 	<p> Permissible tensile force:</p> <ul style="list-style-type: none"> - for stationary use: 100 N - short-term: 350 N
<p> Temperature range:</p> <ul style="list-style-type: none"> - operating: -20°C to +70°C - installation: -10°C to +50°C 	<p> Cable designation: J-V2Y(ZN) 1P 980/1000</p>

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight lbs/mft
			in	mm	
28020001	980/1000 POF	1	0.217	5.5	17

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® POF DUPLEX PE

Duplex buffered polymer optical fiber cable



HITRONIC® POF DUPLEX PE is a duplex buffered fiber optic cable with a twin-cable design. This easy to handle cable is suitable for direct connector assembly and is protected against crosstalk and EMI.

Construction

Core: polymethyl methacrylate (PMMA)

Cladding: fluoropolymers

Buffer tube: halogen-free polyethylene; black

Recommended applications

Indoor stationary optical signal transmission applications in control cabinets, cable ducts, and tubes

Application advantage

- Transmission lengths up to 230 ft (70 m)
- Suitable for direct connector assembly
- Easy to handle
- No crosstalk
- Protected against EMI

Approvals



Cable attributes		page 648	
OIL	OR-00	FLAME	FR-00
MOTION	FL-01	MECH.	MP-01

Technical data


Minimum bend radius:	10 x cable diameter	Permissible tensile force:	
		- for stationary use:	10 N
		- short-term:	30 N
Temperature range:		Cable designation:	J-V2Y 2P 980/1000
- operating:	-55°C to +85°C		
- installation:	-10°C to +50°C		

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight lbs/mft
			in	mm	
28000002	980/1000 POF	2	0.087 x 0.173	2.2 x 4.4	5

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® POF DUPLEX PE-PUR/HEAVY PE-PUR

Duplex buffered polymer optical fiber cable with strain relief & PUR outer jacket

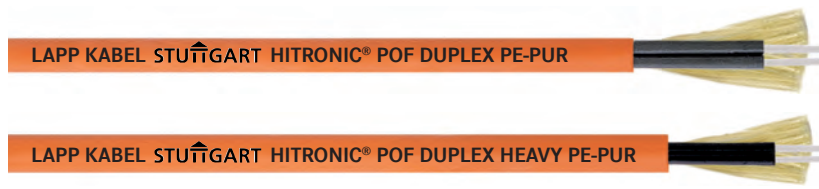

HITRONIC® POF DUPLEX PE-PUR/HEAVY PE-PUR is a duplex buffered fiber optic cable. The cable design includes aramid yarns for strain relief. The jacket can be standard PUR or heavy duty PUR, which make the cable highly resistant against oil and abrasion.

Recommended applications

Indoor stationary applications in industrial environments with high mechanical stress.

Approvals



Cable attributes		page 648	
OIL	OR-04	FLAME	FR-01
MOTION	FL-01	MECH.	MP-05

Construction

- Core: polymethyl methacrylate (PMMA)
- Cladding: fluoropolymers
- Buffer tube: polyethylene; black
- Outer jacket: halogen-free polyurethane; orange
- Strain relief: aramid yarns

Application advantage

- Transmission lengths up to 230 ft (70 m)
- Suitable for direct connector assembly
- Resistant to abrasion, oil, microbes, and hydrolysis
- Flame-retardant & halogen-free jacket

Technical data


Minimum bend radius: - for stationary use: - PE-PUR: 6 x cable diameter - HEAVY PE-PUR: 7 x cable diameter - for dynamic use: 10 x cable diameter	Permissible tensile force: - for stationary use: - PE-PUR: 100 N - HEAVY PE-PUR: 130 N - short-term: 400 N
Temperature range: - operating: -40°C to +70°C - installation: -10°C to +50°C	Cable designation: J-V2Y(ZN)11Y 2P 980/1000

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight lbs/mft
			in	mm	
HITRONIC® POF DUPLEX PE-PUR					
28020002	980/1000 POF	2	0.217	5.5	19
HITRONIC® POF DUPLEX HEAVY PE-PUR					
28030002	980/1000 POF	2	0.315	8.0	19

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® PCF DUPLEX

Duplex buffered plastic-clad fiber cable for stationary applications

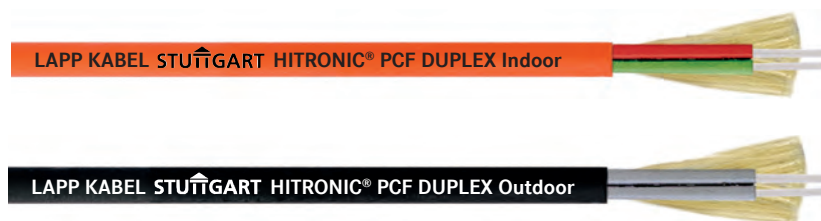

HITRONIC® PCF DUPLEX is a duplex, buffered, plastic-clad fiber optic cable and is available in indoor and outdoor versions. The outdoor version is UV-resistant, watertight, and provides rodent protection.

Recommended applications

Indoor or outdoor applications in harsh industrial environments

Approvals



Cable attributes: indoor		page 648	
OIL	OR-04	FLAME	FR-01
MOTION	FL-01	MECH.	MP-05

Indoor construction

- Core:** polymer-clad fiber (PCF)
- Cladding:** fluoropolymers
- Buffer tube:** ETFE
- Inner jacket:** FRNC; red and green
- Outer jacket:** halogen-free polyurethane; orange
- Strain relief:** aramid yarns

Outdoor construction

- Core:** polymer-clad fiber (PCF)
- Cladding:** fluoropolymers
- Buffer tube:** ETFE
- Inner jacket:** FRNC; red and green
- Outer jacket:** polyethylene; black
- Strain relief:** glass yarns

Application advantage

- Transmission lengths up to 1,640 ft (500 m)
- Complies with requirements for all field bus systems
- Suitable for direct connector assembly
- Highly resistant against oil and chemicals
- EMI protection

Cable attributes: outdoor		page 648	
OIL	OR-00	FLAME	FR-00
MOTION	CF-01	MECH.	MP-01

Technical data

Minimum bend radius:
 - for stationary use: 15 x cable diameter
 - for dynamic use: 20 x cable diameter

Temperature range:
 - operating: -20°C to +70°C
 - installation: -10°C to +50°C

Permissible tensile force:
 - for stationary use:
 - indoor: 400 N
 - outdoor: 500 N
 - short-term:
 - indoor: 1200 N
 - outdoor: 1500 N

Cable designation:
 - indoor: J-V(ZN)H11Y 2K 200/230
 - outdoor: A-V(ZN)HB2Y 2K 200/230

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Indoor					
28020702	200/230 PCF	2	0.315	8.0	37
Outdoor					
28620702	200/230 PCF	2	0.414	10.5	60

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® PCF DUPLEX FD

Duplex buffered plastic-clad fiber cable for continuous flex applications

LAPP KABEL STU^TGART HITRONIC® PCF DUPLEX FD



HITRONIC® PCF DUPLEX FD is a plastic-clad fiber optic cable designed for use in continuous flex applications such as cable tracks. The cable has a highly oil-resistant PUR jacket and is suitable for direct connector assembly. The maximum transmission length is 1,640 ft (500 m).

Recommended applications

Indoor and outdoor use; stationary and continuous flex applications in harsh industrial environments; cable tracks; as a link between moving machine parts

Approvals



Cable attributes		page 648	
OIL	OR-00	FLAME	FR-00
MOTION	FL-01	MECH.	MP-01

Construction

Core: polymer-clad fiber (PCF)

Cladding: fluoropolymers

Buffer tube: ETFE

Inner jacket: FRNC; red and green

Outer jacket: halogen-free polyurethane; orange

Strain relief: aramid yarns

Application advantage

- Designed for use in cable tracks
- Highly resistant against oil and chemicals
- Complies with requirements for all field bus systems
- Suitable for direct connector assembly
- Transmission lengths of up to 1,640 ft (500 m)

Technical data

Minimum bend radius:	- for stationary use: 15 x cable diameter	- for dynamic use: 20 x cable diameter	Permissible tensile force:	- for stationary use: 800 N	- short-term: 2000 N
Temperature range:	- operating: -20°C to +70°C	- installation: -10°C to +50°C	Cable designation:	A/J-V(ZN)H11Y	

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight lbs/mft
			in	mm	
28320702	200/230 PCF	2	0.347	8.8	37

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® HQN

Single-mode & multi-mode glass optical fiber cable for outdoor applications



HITRONIC® HQN is an outdoor glass fiber optic cable available with up to 24 fibers. The cable design includes a loose central tube, water-blocking reinforced glass yarns which act as strain relief, and a UV-resistant, halogen-free PE outer jacket.

Construction

- Core:** glass
- Cladding:** glass
- Tube:** gel-filled loose tube
- Outer jacket:** halogen-free polyethylene; black
- Strain relief:** reinforced glass yarns

Recommended applications

Outdoor use; direct burial; campus backbone; WAN applications; industrial environments; empty plastic pipes, ducts, and trays

Approvals



Cable attributes		page 648	
OIL	OR-00	FLAME	FR-00
MOTION	FL-01	MECH.	MP-01

Application advantage

- Easy to install due to compact and flexible design
- Suitable for direct burial (rodent protected)
- Rugged halogen-free PE outer jacket
- UV and water resistant

Technical data

<p> Minimum bend radius:</p> <ul style="list-style-type: none"> - for stationary use: 15 x cable diameter - for dynamic use: 20 x cable diameter <p> Temperature range:</p> <ul style="list-style-type: none"> - operating: -20°C to +70°C - installation: 0°C to +50°C 	<p> Permissible tensile force:</p> <ul style="list-style-type: none"> - for stationary use: 1500 N - short-term: 3000 N <p> Identification of fibers: red, green, blue, yellow, gray, violet, brown, orange, white, pink, black, turquoise</p> <p> Cable designation: A-DQ(ZN)B2Y</p>
---	--

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 50 OM3					
27600304	50/125 OM3	4	0.288	7.3	27
27600308	50/125 OM3	8	0.288	7.3	27
27600312	50/125 OM3	12	0.288	7.3	27
27600324	50/125 OM3	24	0.327	8.3	44
Multi-mode G 50 OM2					
27600204	50/125 OM2	4	0.288	7.3	27
27600208	50/125 OM2	8	0.288	7.3	27
27600212	50/125 OM2	12	0.288	7.3	27
27600224	50/125 OM2	24	0.327	8.3	44

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 62.5 OM1					
27600104	62.5/125 OM1	4	0.288	7.3	27
27600108	62.5/125 OM1	8	0.288	7.3	27
27600112	62.5/125 OM1	12	0.288	7.3	27
27600124	62.5/125 OM1	24	0.327	8.3	44
Single-mode E 9 OS2					
27600904	9/125 OS2	4	0.288	7.3	27
27600908	9/125 OS2	8	0.288	7.3	27
27600912	9/125 OS2	12	0.288	7.3	27
27600924	9/125 OS2	24	0.327	8.3	44

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® HUN

Single-mode & multi-mode glass optical fiber cable for indoor & outdoor applications



HITRONIC® HUN is a glass fiber optic cable designed for indoor and outdoor applications. The outer jacket is highly flame retardant and halogen-free. The cable comes with a loose single tube for up to 24 fibers and multiple tubes for 24 fibers and more.

Recommended applications

Indoor and outdoor use; campus backbone; industrial environments; WAN applications; empty plastic pipes, ducts, and trays

Cable attributes		page 648	
OIL	OR-00	FLAME	FR-03
MOTION	FL-01	MECH.	MP-01

Construction

Core: glass

Cladding: glass

Tube: gel-filled loose tube(s): single tube design (up to 24 fibers) • multi-tube design (24 fibers and more)

Outer jacket: LSZH compound; black

Strain relief: reinforced glass yarns

Application advantage

- Suitable for indoor and outdoor applications
- Easy to install due to compact and flexible design
- Flame-retardant & halogen-free outer jacket
- UV and water resistant

Approvals



Technical data

Minimum bend radius:
 - for stationary use: 15 x cable diameter
 - for dynamic use: 20 x cable diameter

Temperature range:
 - operating: -30°C to +70°C
 - installation: 0°C to +50°C

Permissible tensile force:
 - for stationary use: 1500 N
 - short-term: 2000 N

Identification of fibers: red, green, blue, yellow, gray, violet, brown, orange, white, pink, black, turquoise

Cable designation: A/J-DQ(ZN)BH

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 50 OM3					
27400304	50/125 OM3	4	0.288	7.3	36
27400308	50/125 OM3	8	0.288	7.3	36
27400312	50/125 OM3	12	0.288	7.3	36
27400324	50/125 OM3	24	0.327	8.3	40
26400324	50/125 OM3	24	0.366	9.3	56
26400348	50/125 OM3	48	0.433	11	73
Multi-mode G 50 OM2					
27400204	50/125 OM2	4	0.288	7.3	36
27400208	50/125 OM2	8	0.288	7.3	36
27400212	50/125 OM2	12	0.288	7.3	36
27400224	50/125 OM2	24	0.327	8.3	40

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 62.5 OM1					
27400104	62.5/125 OM1	4	0.288	7.3	36
27400108	62.5/125 OM1	8	0.288	7.3	36
27400112	62.5/125 OM1	12	0.288	7.3	36
27400124	62.5/125 OM1	24	0.327	8.3	40
Single-mode E 9 OS2					
27400904	9/125 OS2	4	0.288	7.3	36
27400908	9/125 OS2	8	0.288	7.3	36
27400912	9/125 OS2	12	0.288	7.3	36
27400924	9/125 OS2	24	0.327	8.3	40
26400924	9/125 OS2	24	0.366	9.3	56
26400948	9/125 OS2	48	0.433	11	73
26400972	9/125 OS2	72	0.496	12.6	99
26400996	9/125 OS2	96	0.563	14.3	128
26400944	9/125 OS2	144	0.670	17	149

HITRONIC® HDM

Multi-mode glass optical fiber cable for frequent reeling and unreeling



HITRONIC® HDM is a glass fiber optic cable with a highly flexible design suitable for frequent reeling and unreeling. The cable comes with up to 8 tight-buffered fibers, aramid yarns which provide strain relief, and a halogen-free outer jacket.

Construction

Core: tight-buffered glass fibers

Cladding: glass

Outer jacket: halogen-free polyurethane; black

Strain relief: aramid yarns

Recommended applications

Indoor and outdoor use; highly flexible applications; temporary installations such as event management; industrial environments

Approvals



Cable attributes		page 648	
OIL	OR-04	FLAME	FR-00
MOTION	FL-02	MECH.	MP-05

Application advantage

- Designed for highly flexible applications
- For direct connector assembly
- Easy to coil for mobile use
- Based on military spec MIL-C-85045
- Flame-retardant & halogen-free jacket

Technical data

Minimum bend radius:
 - for stationary use: 15 x cable diameter
 - for dynamic use: 20 x cable diameter

Temperature range:
 - for stationary use: -40°C to +70°C
 - for flexible use: -20°C to +60°C

Identification of fibers: blue, orange, green, brown, gray, white, red, black

Cable designation: A/J-V(ZN)11Y

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 50 OM4					
26610404	50/125 OM4	4	0.217	5.5	16
26610406	50/125 OM4	6	0.221	5.6	19
26610408	50/125 OM4	8	0.244	6.2	24
Multi-mode G 50 OM3					
26610304	50/125 OM3	4	0.217	5.5	16
26610306	50/125 OM3	6	0.221	5.6	19
26610308	50/125 OM3	8	0.244	6.2	24

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 50 OM2					
26610204	50/125 OM2	4	0.217	5.5	16
26610206	50/125 OM2	6	0.221	5.6	19
26610208	50/125 OM2	8	0.244	6.2	24
Multi-mode G 62.5 OM1					
26610104	50/125 OM1	4	0.217	5.5	16
26610106	50/125 OM1	6	0.221	5.6	19
26610108	50/125 OM1	8	0.244	6.2	24

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® TORSION

Single-mode & multi-mode glass optical fiber cable for torsion applications



HITRONIC® TORSION is a fiber optic cable suitable for torsion applications in industrial environments. The cable is available with up to 12 tight-buffered fibers and allows direct connector assembly.

Construction

- Core: tight-buffered glass fibers
- Cladding: glass
- Inner jacket: LSZH
- Outer jacket: halogen-free polyurethane; black
- Strain relief: aramid yarns

Recommended applications

Indoor and outdoor use; torsion applications in industrial environments; as a link between moving machinery parts

Approvals



Cable attributes		page 648	
OIL	OR-04	FLAME	FR-00
MOTION	FL-02	MECH.	MP-05

Application advantage

- Torsion-resistant and very flexible
- For direct connector assembly
- Based on military spec MIL-C-85045
- Flame-retardant & halogen-free jacket

Technical data

<p> Minimum bend radius:</p> <ul style="list-style-type: none"> - for stationary use: 15 x cable diameter - for dynamic use: 20 x cable diameter 	<p> Identification of fibers:</p> <p>blue, orange, green, brown, gray, white, red, black, yellow, violet, pink, turquoise</p>
<p> Temperature range:</p> <ul style="list-style-type: none"> - for stationary use: -40°C to +70°C - for flexible use: 0°C to +50°C 	<p> Cable designation:</p> <p>A/J-V(ZN)H11Y</p>

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight lbs/mft	Permitted tensile force (N)		
			in	mm		installation	short term	
Multi-mode G 50 OM3								
26310302	50/125 OM3	2	0.331	8.4	36	600	1,000	
26310304	50/125 OM3	4	0.331	8.4	36	800	1,350	
26310308	50/125 OM3	8	0.457	11.6	64	1,600	2,700	
26310312	50/125 OM3	12	0.489	12.4	82	2,400	3,500	
Multi-mode G 50 OM2								
26310202	50/125 OM2	2	0.331	8.4	36	600	1,000	
26310204	50/125 OM2	4	0.331	8.4	36	800	1,350	
26310208	50/125 OM2	8	0.457	11.6	64	1,600	2,700	
26310212	50/125 OM2	12	0.489	12.4	82	2,400	3,500	
Multi-mode G 62.5 OM1								
26310102	62.5/125 OM1	2	0.331	8.4	36	600	1,000	
26310104	62.5/125 OM1	4	0.331	8.4	36	800	1,350	
26310108	62.5/125 OM1	8	0.457	11.6	64	1,600	2,700	
26310112	62.5/125 OM1	12	0.489	12.4	82	2,400	3,500	
Single-mode E 9 OS2								
26310902	9/125 OS2	2	0.331	8.4	36	600	1,000	
26310904	9/125 OS2	4	0.331	8.4	36	800	1,350	
26310908	9/125 OS2	8	0.457	11.6	64	1,600	2,700	
26310912	9/125 OS2	12	0.489	12.4	82	2,400	3,500	

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.

HITRONIC® FIRE

Single-mode & multi-mode glass optical fiber cable with fire-resistant design



HITRONIC® FIRE is a universal (indoor/outdoor) fire-resistant loose-tube fiber optic cable with a corrugated steel tape armor, a strain relief element, and a halogen-free outer jacket. The cable is water-tight and provides excellent rodent protection.

Recommended applications

Indoor and outdoor use; can be installed in highly combustible or fire-prone areas and harsh environments such as tunnels

Approvals



Cable attributes		page 648	
OIL	OR-00	FLAME	FR-04
MOTION	FL-01	MECH.	MP-01

Construction

- Core: glass
- Cladding: glass
- Tube: gel-filled loose tube
- Inner jacket: LSZH; black
- Outer jacket: LSZH; black
- Strain relief: reinforced glass yarns
- Armoring: corrugated steel tape

Application advantage

- Fire-resistant design: data transmission even in event of fire for up to 90 minutes (IEC 60331-25)
- Steel armor provides excellent protection against mechanical stress and rodents
- UV and water resistant

Technical data

<p> Minimum bend radius:</p> <ul style="list-style-type: none"> - for stationary use: 15 x cable diameter - for dynamic use: 20 x cable diameter <p> Temperature range:</p> <ul style="list-style-type: none"> - operating: -30°C to +70°C - installation: 0°C to +50°C 	<p> Permissible tensile force:</p> <ul style="list-style-type: none"> - for stationary use: 1500 N - short-term: 2200 N <p> Identification of fibers: blue, orange, green, brown, gray, white, red, black, yellow, violet, pink, turquoise</p> <p> Cable designation: A/J-DQ(ZN)BH(SR)H or U-DQ(ZN)BH(SR)H</p>
---	---

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 50 OM3					
27560304	50/125 OM3	4	0.386	9.8	83
27560308	50/125 OM3	8	0.386	9.8	83
27560312	50/125 OM3	12	0.504	12.8	126
27560324	50/125 OM3	24	0.504	12.8	126
Multi-mode G 50 OM2					
27560204	50/125 OM2	4	0.386	9.8	83
27560208	50/125 OM2	8	0.386	9.8	83
27560212	50/125 OM2	12	0.504	12.8	126
27560224	50/125 OM2	24	0.504	12.8	126

Part number	Fiber type	Number of fibers	Nominal outer diameter		Approx. weight
			in	mm	lbs/mft
Multi-mode G 50 OM1					
27560104	62.5/125 OM1	4	0.386	9.8	83
27560108	62.5/125 OM1	8	0.386	9.8	83
27560112	62.5/125 OM1	12	0.504	12.8	126
27560124	62.5/125 OM1	24	0.504	12.8	126
Single-mode E 9 OS2					
27560904	9/125 OS2	4	0.386	9.8	83
27560908	9/125 OS2	8	0.386	9.8	83
27560912	9/125 OS2	12	0.504	12.8	126
27560924	9/125 OS2	24	0.504	12.8	126

Photographs are not to scale and are not true representations of the products in question. If not otherwise specified, all values relating to the product are nominal values.



U268 LAPP KABEL STUFGART HITRONICO

U268 LAPP KABEL STUFGART HITRONICO

U268 LAPP KABEL STUFGART HITRONICO